



The simplest, most robust conference room video extension solution on the market.

The Transmitter plugs directly into your laptop's video output, and the Receiver into the HDMI video input of your display. No drivers or software to install. No WiFi limitations. If your laptop can display it, it will be sent to the display.

Autodiscovery plug and play

ZVconnect receivers will auto-discover any ZVconnect transmitters in range. No WiFi network required. Just plug the transmitter into the source and you're ready to go.

Multiple Connection Options

Directly connect to either HDMI devices or USB-C devices such as MacBooks, Chrome tablets and Smartphones that support video output.

HD Formats


Transmitter supports inputs up to 1920 x 1200 at 60 Hz.*
Receiver scales output up to 3840 x 2160 at 60 Hz.*

Multi-view

Supports side by side multiview allowing 2 transmitters to be viewed simultaneously.

Control

Simple button press on the transmitter to begin sharing. Long button press to initiate multi-view feature.

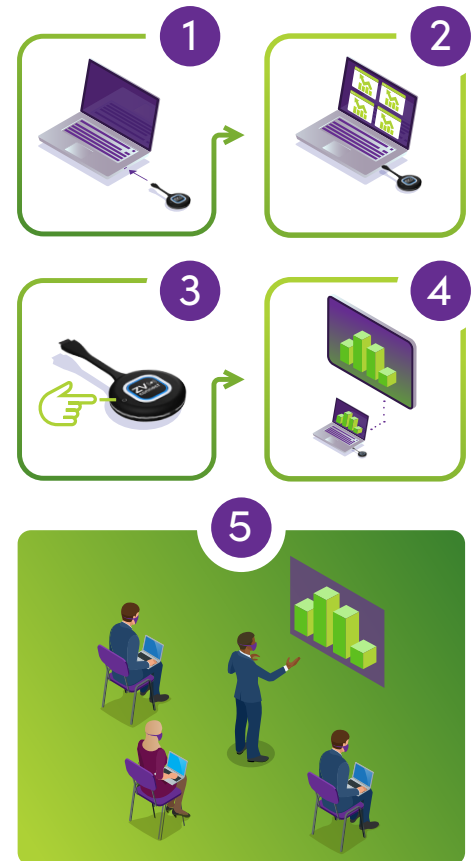

Features:

- True Plug & Play
- Zero Software
- Zero Network Setup
- Point to Point Connection
- WPA2 AES-CCMP Encryption

Models:

- ZVCTXHDMI**
Wireless transmitter with HDMI input
- ZVCTXUSBC**
Wireless transmitter with USB-C input

ZVCRXHDMI

- Wireless receiver with HDMI output
- ZVCCARGE**
Optional charging cradle with support for 4 ZVconnect transmitters

Transmitters

Model	ZVCTXHDMI	ZVCTXUSBC
Description/Interface	Wireless transmitter with HDMI interface	Wireless transmitter with USB-C interface
In the box	Transmitter, USB cable, 2A USB power block	Transmitter, USB cable, 2A USB power block
Video Codec	H.265	H.265
Resolution Support	Up to 1920 x 1080 @60Hz input*	Up to 1920 x1080 @60Hz input*
WLAN	IEEE802.11a/b/g/n/ac 5 Ghz (5.150 ~ 5.850 Ghz)	IEEE802.11a/b/g/n/ac 5 Ghz (5.150 ~ 5.850 Ghz)
Security	WPA2 AES-CCMP	WPA2-AES-CCMP
Audio	2-channel stereo	2-channel stereo
Power	Battery or DC Adapter 5V/1A	Battery or DC Adapter 5V/1A
Latency	< 200ms	< 200ms
Transmission Distance	40+ feet	40+ feet
Battery life	6 hours	6 hours
Battery charging time	4 hours	4 hours
Dimensions	6.7in x 2.8in x 1.2in	6.7in x 2.8in x 1.2in
Weight	0.27 lbs	0.26 lbs

Receiver

Model	ZVCRXHDMI
Description/Interface	Wireless receiver with HDMI interface
In the box	Receiver, USB cable, 2A USB power block
Video Codec	H.265
Resolution	3840 x 2160 @60Hz*, 1920 x 1080 @60Hz*, 1920 x 1200 @60Hz*
WLAN	IEEE802.11a/b/g/n/ac 5 Ghz (5.150 ~ 5.850 Ghz)
Security	WPA2 AES-CCMP
Maximum Number of Synced Transmitters	254 (Only 2 can be displayed at any time)
Audio	2-channel stereo
Power	DC Adapter 5V/2A
Latency	< 200ms
Dimensions	6.7in x 2.8in x 1.2in
Weight	0.13 lbs

Certifications and Warranty

Standard	CE	Yes
	RoHS	Yes
	FCC	Yes
Warranty	1 Year	

*Input Resolution reduced to 30Hz for transmission. Scaled back to 60Hz at Receiver

REV 2020-10-07



ZVconnect™
Wireless Presentation System

Connections:

1. .USB-C or HDMI Connector
2. Power button
3. Transmit button
4. USB port for charging



ZeeVee, Inc., headquartered in Littleton, Mass., and founded in 2007, is a leading global developer of digital technology and products for distributing audio-video content from any source or multiple sources to any number of displays.

ZeeVee products are employed worldwide by major organizations in education, government, hospitality, retail, sports, entertainment, broadcasting, healthcare, housing, energy and other industries.

For more information visit www.zeevee.com

zeevee
Intelligent AV Distribution