


# ZvSync-NA

## Digital Cable Tuner


ZvSync is a digital cable tuner with HDMI and composite outputs. It can be used for any display that is not equipped with a built-in digital tuner, such as: projectors, HDTVs without tuners, commercial displays, monitors, and analog TVs.

### Digital Cable on Any Display

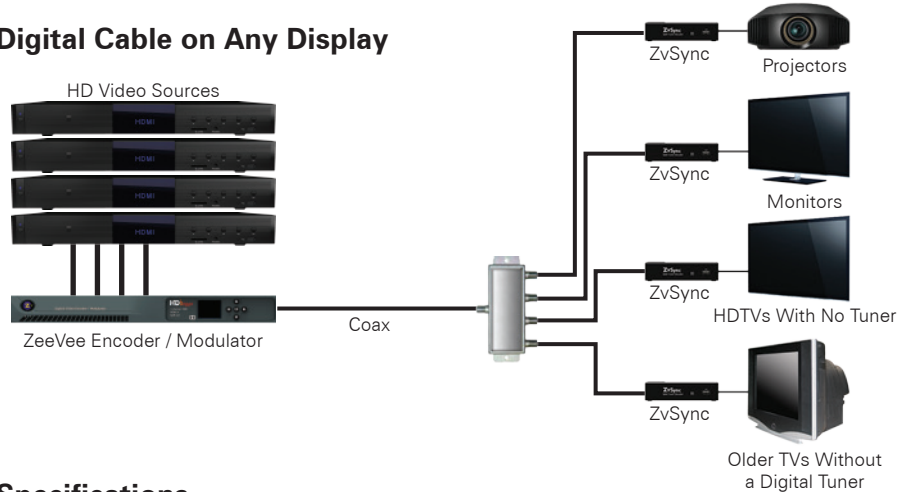

### Specifications

| GENERAL                               |  |
|---------------------------------------|--|
| <b>Model Name</b>                     | ZvSync   |
| <b>Part Number</b>                    | ZvSync-NA  |
| <b>Compliance</b>                     | UL, CE, TuV, CSA, FCC<br>Low Voltage Directive 2006/95/EC<br>EN60065:2002+A1:2006<br>EMC Directive 2004/108/EC<br>EN 55 013:2001+A1:2003+A2:2006, EN 55 020:2007<br>EN 61 000-3-2:2006, EN 61 000-3-3:2008 |
| <b>Carton Dimensions (individual)</b> | 3.5" x 6.75" x 5.5   |
| <b>Shipping Weight</b>                | 18 oz  |
| <b>Warranty</b>                       | 90 Days  |
| TUNER                                 |  |
| <b>Input Frequency Range</b>          | 48-862MHz  |
| <b>RF Input Level</b>                 | -20 to -82dBm  |
| <b>IF Bandwidth</b>                   | 6,7, and 8MHz  |
| <b>Modulation</b>                     | ATSC(8VSB) 16QAM, 64QAM, 256QAM  |
| VIDEO                                 |  |
| <b>Decoder Format</b>                 | MPEG4 AVC/H.264 HP@I4<br>MPEG2 MP@ML/HL  |
| <b>Output Format</b>                  | 480i, 480p, 720p, 1080i, 1080p60Hz   |
| <b>Aspect Ratio</b>                   | 4:3, 16:9, Auto  |
| <b>Output Ports</b>                   | HDMI(v1.3C), CVBS  |
| AUDIO                                 |  |
| <b>Decoder Format</b>                 | MPEG-1(layer 1 & 2 & 3), WMA, AC-3   |
| <b>Audio Output</b>                   | Digital Audio over HDMI, RCAx2(L/R)  |
| USB2.0                                |  |
| <b>Supported Capacity</b>             | Unlimited  |
| <b>Supported Media</b>                | MP3, WMA, JPEG, BMP, AVI   |
| POWER                                 |  |
| <b>Supply Voltage (Wall)</b>          | 100-240VAC 50-60Hz   |
| <b>Supply Voltage (ZvSync Unit)</b>   | 5VDC   |
| <b>Maximum Power Consumption</b>      | 10W  |
| <b>Standby Power Consumption</b>      | <0.8W  |
| <b>Nominal Power Consumption</b>      | 5W   |
| ACCESSORIES (included)                |  |
| <b>Remote Control</b>                 | controls decoder with learning function for basic control of television  |
| <b>AA Batteries (2x)</b>              | remote control power   |
| <b>Composite Cable</b>                | connects to television when using CVBS output  |
| <b>IR Sensor</b>                      | Connects to IR port, allows tuner to be installed in an unobtrusive location   |
| <b>External Power Supply</b>          | connects to AC outlet. Provide low voltage DC to tuner unit  |

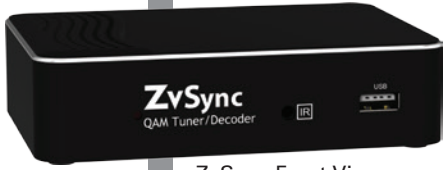


ZvSync Front View



ZvSync Rear View



ZvSync Remote Control

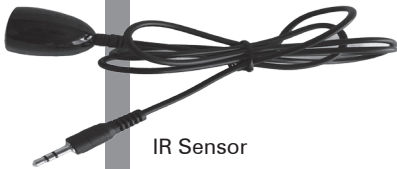

IR Sensor



**North America**  
+1.347.851.7364  
sales@zeevee.com

**International**  
+1.347.851.7364  
Intl-sales@zeevee.com

**EMEA**  
+44 1494 956677  
EMEAsales@zeevee.com

**zeevee.com**

BOSTON | DENVER | LONDON